T794FI

FAMILY-SIZE DRYER
PANEL READY

T794 Line Series™ Style
T794CFI Type: Fully Integrated Condenser dryer

T794FI Type: Family-size vented dryer Line Series™ Style

Colors: Optional accessory door panels in TouchProof™ Stainless Steel, White and Black or consumer supplied custom wood panel.

PROGRAMS
Auto extra dry, Auto dry, Auto normal dry, Auto iron dry, Auto jeans, Auto synthetic, Timed dry and Dry fluff, Auto down, Auto terry

OPTIONS
Anti-Crease, Low temperature, Delay Start (24 hrs) and TimeSaver™ cool down and End of program signal

CAPACITY
UltraCare™ - family-size capacity

ENVIRONMENTAL
Energy efficient, Majority of manufacturing components labeled for recycling and Certified ISO14001 for environmental quality

TECHNOLOGY
Line Series™ Style control with LCD full graphic display, SensiDry™ sensor, Butterfly™ drying system, Double lint filter and Cleanable fan

CONSTRUCTION
Stainless Steel drum, Ball bearing suspension, Heavy duty life-tested motor, 66 dB(A) noise level, Galvanized steel rear panel

SIMPLICITY/COMFORT
Program memory. Countdown time display, Drum light, Stacking kit included, Reversible door, Vents up to 60´, 3-way venting and 12 languages

SAFETY
KidSafe™ – child-safe start option

WARRANTY
Industry leading 2 Plus 1 Warranty – up to three years parts and labor protection

PLANNING & DESIGN: FAMILY-SIZE DRYER – LINE SERIES™

T794FI, T784, T754 Vented Dryers

Unit Dimensions

		US	METRIC
HEIGHT:		33 ½″– 34 ½″	851 – 876 mm
WIDTH:		23 ½″	597 mm
DEPTH:	T753	23 7/8″ *	606 mm
	T793FI	23 1/8″ **	587 mm
	T783	23 7/8″ *	606 mm
DEPTH WITH DOOR OPEN:	T753	46 1/8″	1172 mm
	T793FI	47 7/8″	1216 mm
	T783	46 1/8″	1172 mm
WEIGHT:		86 lbs	39 kg

*Includes control knob.
**Does not include accessory door panel.

Technical Data

Supply voltage	Single-phase 220 V, 60 Hz
Max Wattage	3000 W

NOTE: *When on a separate outlet, use 220 V, 20 Amp single-phase circuit. When an ASKO washer is connected, use 220 V, 30 Amp single-phase circuit.*

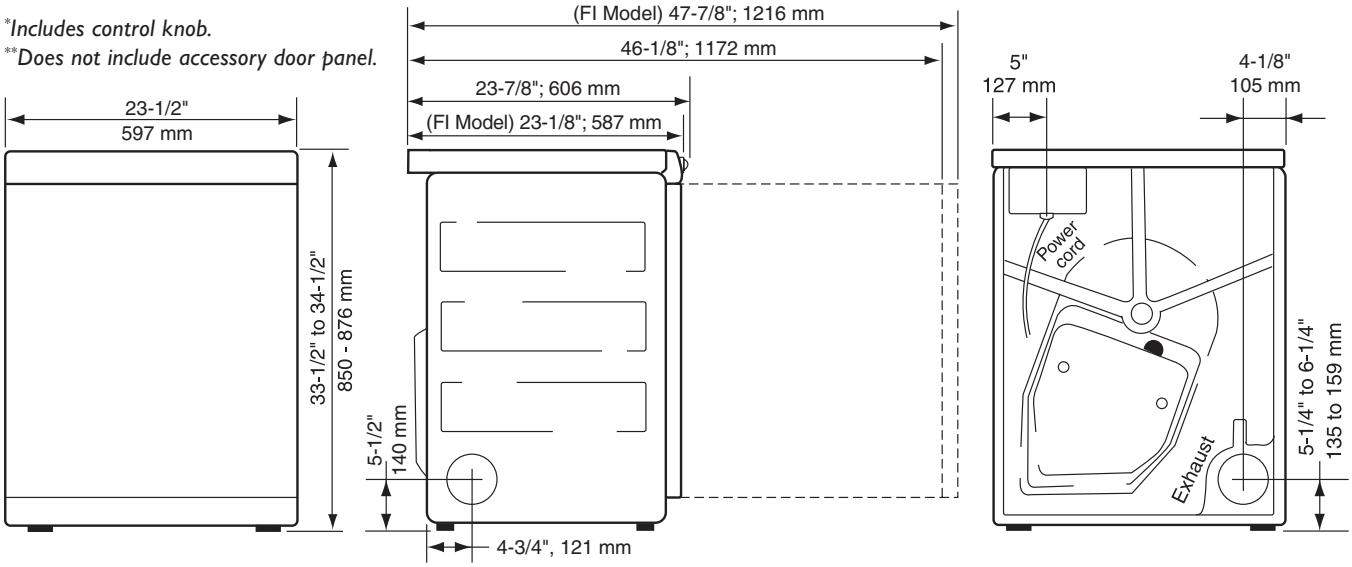

The door hinges on ASKO dryers are shipped left-hinged, but they are reversible. See the *ASKO Dryer Use and Care Guide* for more information.

When placing the dryer next to a wall or cabinet, be sure to leave ¼″ (6 mm) of space between the dryer and the wall or cabinet.

See page 35-36 for stacked washer/dryer dimensions.

See pages 38-40 for cutout dimensions for closet and under-cabinet installations.

NOTE: *Power cord not supplied with unit.*

Specifications are subject to change without notice. See installation instructions for additional details.

Venting Requirements

WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

The exhaust hose should be run with as few bends as possible to the point of discharge. Maximum duct length of 60′ (1829 cm) is allowed. Make any bends as gentle as possible. A maximum of four 90° bends may be fitted in the hose, otherwise the performance of the dryer will be impeded. Subtract 4′ (122 cm) of duct for each 90° elbow. If more than 20' (210 cm) of duct is needed, we recommend increasing the diameter of the duct to 6″ or 8″ (152 mm or 203 mm).

If the exhaust hose is taken to a wall outlet, a ventilation grill should be fitted to prevent reverse flow of cold air. Fit the ventilation grill to the outside or inside of the wall.

This appliance should not be exhausted into a chimney, a wall, a ceiling, or a concealed space of a building. Only a metal ventilation grill should be used.

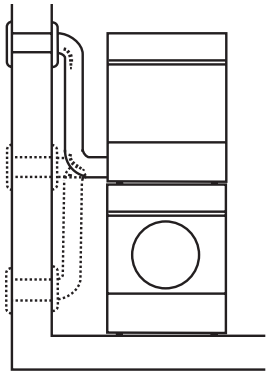

Installation Examples

Subtract 4 feet (122 cm) for every 90° elbow.

T794CFI & T754C Condenser Dryers (Ventless)

Unit Dimensions

	US	METRIC
HEIGHT:	33 ½″– 34 ½″	851 – 876 mm
WIDTH:	23 ½″	597 mm
DEPTH:	23 7/8″	606 mm
DEPTH W/DOOR OPEN:	46 1/8″	1172 mm
WEIGHT:	104 lbs	47 kg

*Includes control knob.

Technical Data

Supply voltage	Single-phase 220 V, 60 Hz
Max Wattage	2800 W

NOTE: *When on a separate outlet, use 220 V, 20 Amp single-phase circuit. When an ASKO washer is connected, use 220 V, 30 Amp single-phase circuit.*

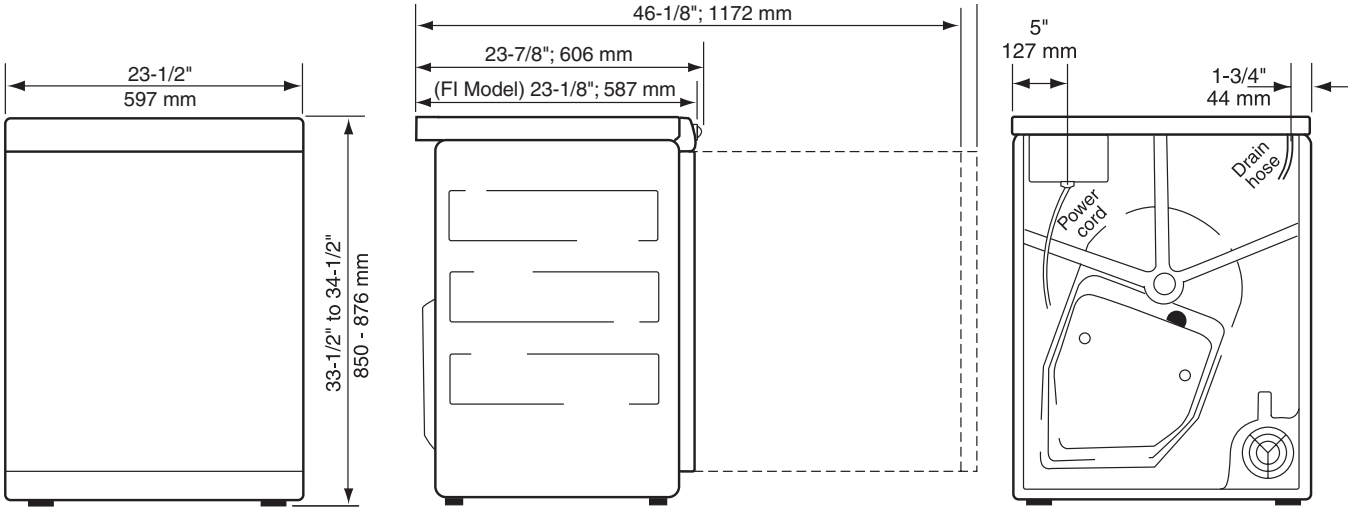

The door hinges on ASKO dryers are shipped left-hinged, but they are reversible. See the *ASKO Dryer Use and Care Guide* for more information.

When placing the dryer next to a wall or cabinet, be sure to leave ¼″ (6 mm) of space between the dryer and the wall or cabinet.

NOTE: *Condenser dryers require adequate ventilation for proper operation.*

NOTE: *A louvered door is recommended for closet installations.*

See page 35-36 for stacked washer/dryer dimensions.

See pages 37-40 for cutout dimensions for closet and under-cabinet installations.

NOTE: *Power cord not supplied with unit.*

NOTE: *The drain hose must not be more than 40″ (1016 mm) above the floor or the bottom of the unit.*

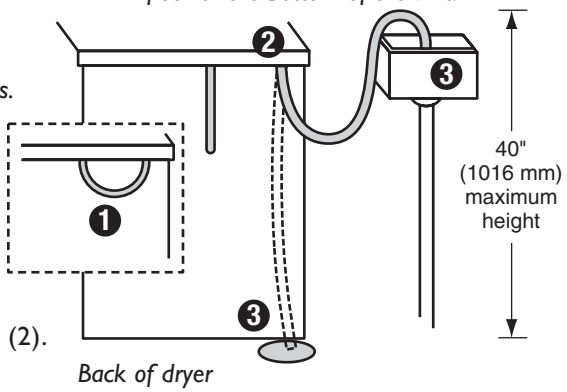

Condensation Drain Requirements

You must install the dryer so the condensed water will continuously flow into a drain or sink. To do this, follow the instructions below:

1. Disconnect the short hose (1) from the blue connection. (It´s okay to let the hose hang down.)
2. Connect the rubber hose supplied with the dryer to the blue nipple (2).
3. Run the hose to a drain or sink, as illustrated.

Specifications are subject to change without notice. See installation instructions for additional details.

ASKO
BUILT TO LAST LONGER

ASKO Designer Laundry
NEW! Dryer T794FI

Image not available!

T794FI
Sensor-controlled fully integrated dryer
Color: Titanium, Optional accessory door panels in TouchProof™ Stainless Steel, White and Black or consumer supplied custom wood panel.

PROGRAMS
Auto terry, Auto down, Auto extra dry, Auto dry, Auto normal dry, Auto iron dry, Auto jeans, Auto synthetic, Timed dry, Air fluff

OPTIONS
Anti-Crease, Low temperature, Delayed Start 1-24hrs,TimeSaver™ cool down and End of program signal

TECHNOLOGY
Line Series™ Style control with LCD full graphic display, SensiDry™ sensor, Butterfly™ drying system, Double lint filter and Cleanable fan

CONSTRUCTION
Stainless Steel drum, Ball bearing suspension, Heavy duty life-tested motor, Galvanized steel rear panel COMFORT
Read out display, languages, program memory, display with program information and remaining time indication/end time (real time), internal light, noise level: 66 dB(A)

SAFETY
KidSafe™

ASKO Appliances, Inc. - PO BOX 940609 - Plano, TX 75094-0609
Phone: 800-898-1879 - Fax: 972-941-1999
E-mail: info@askousa.com - www.askousa.com

Technical specifications - NEW! Dryer T794FI

OPTIONS:	
Timed Dry Program (min)	Yes
Adjustable drying temperature	Yes
Delayed Start (hours)	1-24
CONSUMPTION:	
Voltage (V)	220
Current (A)	20 A
Frequency (Hz)	60
COMFORT:	
Interior light	Yes
OTHERS:	
Dryer type	Vented
OTHER FEATURES:	
Anti-crease function	Yes
Auto Down	Yes
Auto dry	Yes
Auto extra dry	Yes
Auto iron dry	Yes
Auto Jeans	Yes
Auto normal dry	Yes
Auto Synthetic	Yes
Auto Terry	Yes
Automatic programs	Yes
Digital countdown indicator	Yes
Door	Full cover door without window
Double Lint Filter	Yes
Drum material	Stainless Steel
Main color of product	Titanium
Max. Vent hose length (feet)	60
Remaining Time Indication	Yes
Start delay options	Continuous
Type of safety	KidSafe™, Can be opened from inside

ASKO Appliances, Inc. - PO BOX 940609 - Plano, TX 75094-0609
Phone: 800-898-1879 - Fax: 972-941-1999
E-mail: info@askousa.com - www.askousa.com